


CONNECTOR

CROSS REFERENCE

Hole Size 18" - 56"

NOMINAL HOLE SIZE		PSX SIZE	PSX GASKET I.D. (INCHES)		PIPE O.D. ACCOMMODATION RANGE (INCHES (mm))		PSX TAKE-UP CLAMP		MINIMUM SIZE ROUND STRUCTURE (INCHES)
INCH	mm		INCH	mm			(QTY)	PART #	
18	457 mm	18L	14.10	358 mm	13.20 TO 14.50	335 - 368 mm	(2)	600-296	36
		18M	15.35	390 mm	14.60 TO 15.85	371 - 403 mm	(2)	600-296	
		18B	16.42	417 mm	15.60 TO 16.50	396 - 419 mm	(2)	600-296	
20	508 mm	20L	15.92	404 mm	15.00 TO 16.25	381 - 413 mm	(2)	600-296	36
		20A	16.92	430 mm	16.00 TO 17.20	406 - 361 mm	(2)	600-296	
		20B	18.17	462 mm	17.30 TO 18.50	439 - 470 mm	(2)	600-376	
22	559 mm	22L	17.80	452 mm	17.00 TO 18.15	432 - 461 mm	(2)	600-376	42
		22M	18.70	475 mm	18.00 TO 19.50	457 - 495 mm	(2)	600-376	
24	610 mm	22B	20.05	509 mm	19.15 TO 20.40	486 - 518 mm	(2)	600-376	48
		24L	19.55	497 mm	18.60 TO 19.75	472 - 502 mm	(2)	600-376	
		24A	21.93	557 mm	21.00 TO 22.10	533 - 561 mm	(2)	600-376	
26	660 mm	24B	22.43	570 mm	21.50 TO 22.50	546 - 572 mm	(2)	600-376	48
		26L	22.18	563 mm	21.30 TO 22.40	541 - 569 mm	(2)	600-376	
		26A	23.12	587 mm	22.25 TO 23.40	565 - 594 mm	(2)	600-456	
28	711 mm	26B	24.31	617 mm	23.40 TO 24.50	594 - 622 mm	(2)	600-456	48
		28L	24.31	617 mm	23.40 TO 24.60	594 - 625 mm	(2)	600-456	
		28A	25.13	638 mm	24.25 TO 25.50	616 - 648 mm	(2)	600-456	
30	762 mm	28B	26.32	669 mm	25.50 TO 26.50	648 - 673 mm	(2)	600-456	60
		30L	26.32	669 mm	25.40 TO 26.60	645 - 676 mm	(2)	600-456	
		30A	27.12	689 mm	26.25 TO 27.40	667 - 696 mm	(2)	600-456	
32	813 mm	30B	28.32	719 mm	27.40 TO 28.40	696 - 721 mm	(2)	600-456	60
		32L	28.32	719 mm	27.40 TO 28.60	696 - 726 mm	(4)	600-296	
		32A	29.13	740 mm	28.25 TO 29.40	718 - 748 mm	(4)	600-296	
34	864 mm	32B	29.83	758 mm	28.90 TO 30.20	734 - 767 mm	(4)	600-296	60
		34L	30.33	770 mm	29.50 TO 30.70	749 - 780 mm	(4)	600-296	
		34A	31.58	802 mm	30.75 TO 31.75	781 - 806 mm	(4)	600-296	
36	914 mm	34B	32.08	815 mm	31.20 TO 32.30	792 - 820 mm	(4)	600-296	72
		36L	32.08	815 mm	31.20 TO 32.40	792 - 823 mm	(4)	600-296	
		36A	33.59	853 mm	32.60 TO 33.80	828 - 859 mm	(4)	600-296	
38	965 mm	38L	33.59	853 mm	32.70 TO 33.80	831 - 859 mm	(4)	600-296	72
		38B	35.15	893 mm	34.25 TO 35.50	870 - 902 mm	(4)	600-296	
40	1016 mm	40L	35.13	893 mm	34.25 TO 35.50	870 - 902 mm	(4)	600-376	72
		40A	37.22	945 mm	36.25 TO 37.50	921 - 953 mm	(4)	600-376	
		40B	38.35	974 mm	37.45 TO 38.65	951 - 982 mm	(4)	600-376	
42	1067 mm	42L	37.60	955 mm	37.00 TO 38.00	940 - 965 mm	(4)	600-376	72
		42A	38.35	974 mm	37.45 TO 38.65	951 - 982 mm	(4)	600-376	
		42B	40.35	1025 mm	39.45 TO 40.50	1002 - 1029 mm	(4)	600-376	
44	1118 mm	44B	42.33	1075 mm	41.60 TO 42.30	1057 - 1074 mm	(4)	600-376	84
46	1168 mm	46L	41.36	1051 mm	41.00 TO 41.75	1041 - 1060 mm	(4)	600-376	84
		46A	43.12	1095 mm	42.40 TO 43.90	1077 - 1115 mm	(4)	600-376	
		46B	44.33	1126 mm	43.60 TO 44.30	1107 - 1125 mm	(4)	600-376	
48	1219 mm	48L	45.99	1168 mm	45.20 TO 46.20	1148 - 1173 mm	(4)	600-376	84
		48A	44.33	1126 mm	43.60 TO 45.10	1107 - 1125 mm	(4)	600-376	
		48B	44.74	1136 mm	44.00 TO 45.50	1118 - 1156 mm	(4)	600-376	
50	1270 mm	50S	44.99	1143 mm	44.20 TO 45.70	1123 - 1161 mm	(4)	600-376	96
		50S1	45.74	1162 mm	45.00 TO 46.50	1143 - 1181 mm	(4)	600-376	
		50S2	44.74	1136 mm	44.00 TO 45.50	1118 - 1156 mm	(4)	600-376	
52	1321 mm	52A	49.50	1257 mm	48.80 TO 50.30	1240 - 1278 mm	(4)	600-456	96
54	1372 mm	54L	52.01	1321 mm	51.30 TO 52.30	1303 - 1328 mm	(4)	600-456	96
		54A	51.01	1296 mm	50.30 TO 51.80	1278 - 1316 mm	(4)	600-456	
		54S	49.63	1261 mm	48.90 TO 50.40	1242 - 1280 mm	(4)	600-456	
56	1422 mm	56A	52.76	1340 mm	52.00 TO 53.50	1321 - 1359 mm	(4)	600-456	96
		56S	51.29	1303 mm	50.50 TO 52.00	1283 - 1321 mm	(4)	600-456	

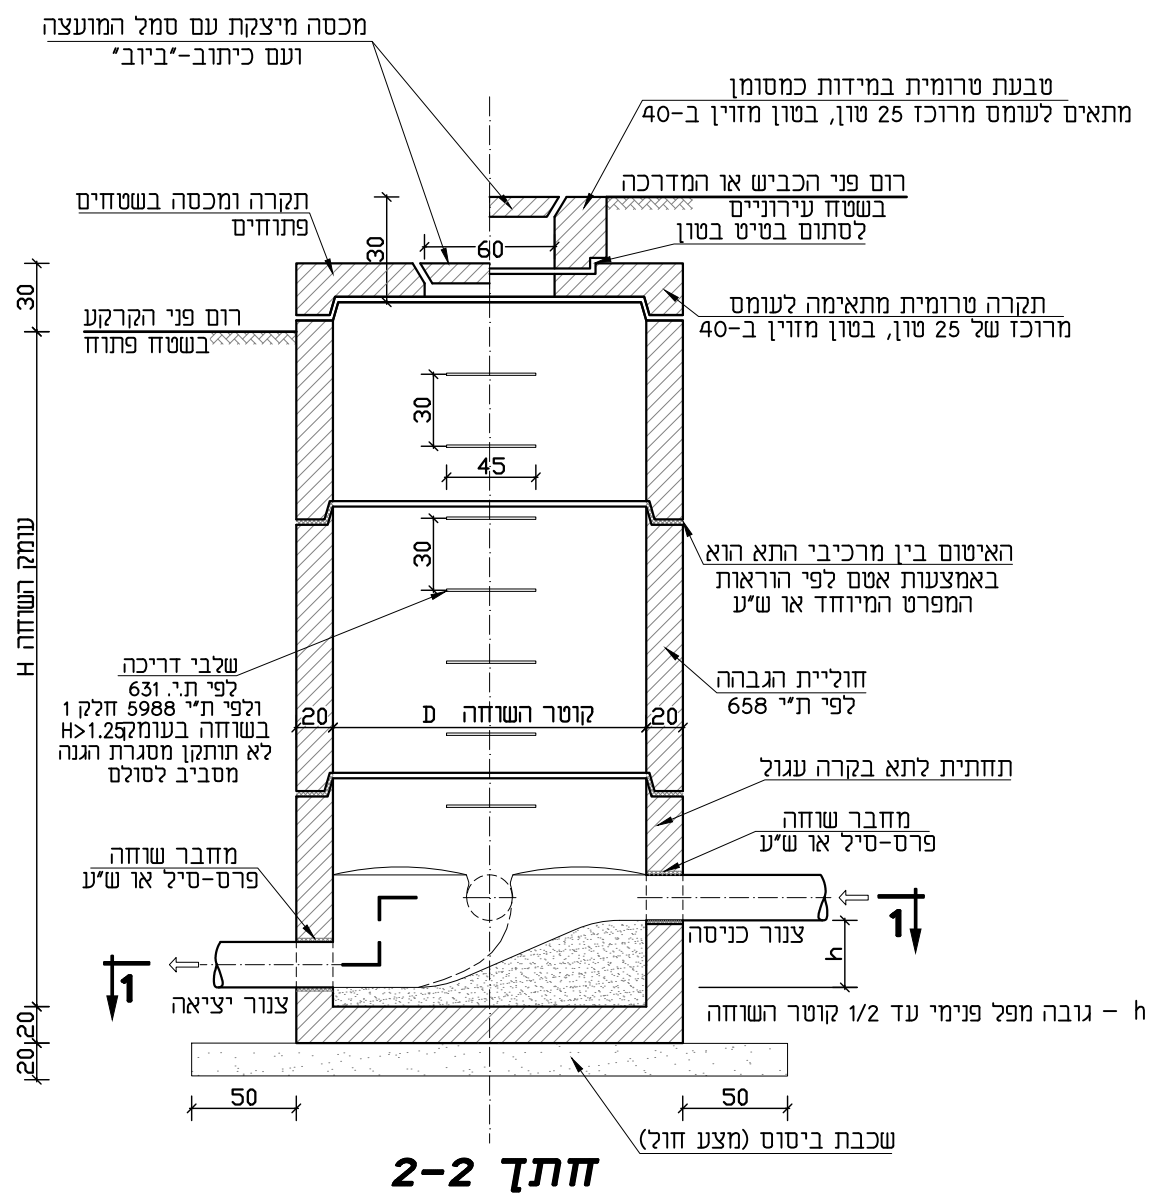



קצה קו יאטם בפיקה חרושתי של יצור הצנרת

(הכנה לחבור עתידי)

-
- Technical drawing of a staircase showing side and top views. The side view (left) shows a staircase with a total height of 3000 mm, divided into three sections of 300 mm, 300 mm, and 300 mm. The width of the staircase is 450 mm. The top view (right) shows the staircase layout with a width of 450 mm and a depth of 300 mm. Labels include 'סולם' (Staircase), 'לדפן השורה' (For the flight), 'לפי תחנית צ"ר' (According to the drawing), and 'לא תחלקו מסגרת' (Do not divide the frame).

סולם להתקנה עבור שווחות בעומק $H < 5.25$ מ' (כלול במחיר השווחה)

	12.08.2020	Information	
	12.07.2022	Tender	
	✓	Execution	
No 2	סמך דרוש	התבצע בדיקת דרישות והתאמתן המפרט והפרטים הנדרשים כל שטח או שטחים הנדרשים לדרישות המפרט והפרטים הנדרשים	
No 556-2	המחיר	ALWAYS THINK SAFETY.	
Design director	תכנן	מעשה אדריכל עשיר	
Designed by	דגש	Project name הרחבת האזורי שפיר	
Checked by	בקר	Subject of drawing שחית ביקורת פרט פנימי	